

TOPSTART

0.5 kW to 4 kW

The TopStart is an electric coolant engine heater with an integrated pump for midsize engines.

BENEFITS

- Even distribution of heat to eliminate cold spots
- Reduces time to reach operating temperatures and full load acceptance
- Reduces engine wear
- Integrated pump and heater body

APPLICATIONS

- Gensets
- Large equipment



SPECIFICATIONS

Heating unit

- Die cast aluminum body
- PA66 electrical cover and supports base
- 4.9 ft (150 cm) power cable
- Heating element made of Incoloy 800

Circulating Pump

- Glandless circulation pump
- Flow rate: 1.6 to 2m³/h to 3m height manometer (7 to 8.8 gpm at 4.7 PSI)

Regulating Thermostat

- 32-176°F (0-80°C)




Safety Thermostat

- Safety thermostat with manual reset rated 25A (230°F/110°C)

Available Power


- 0.5kW to 4kW
- 120V, 208V, 230V

TOPSTART 0.5kW to 4kW

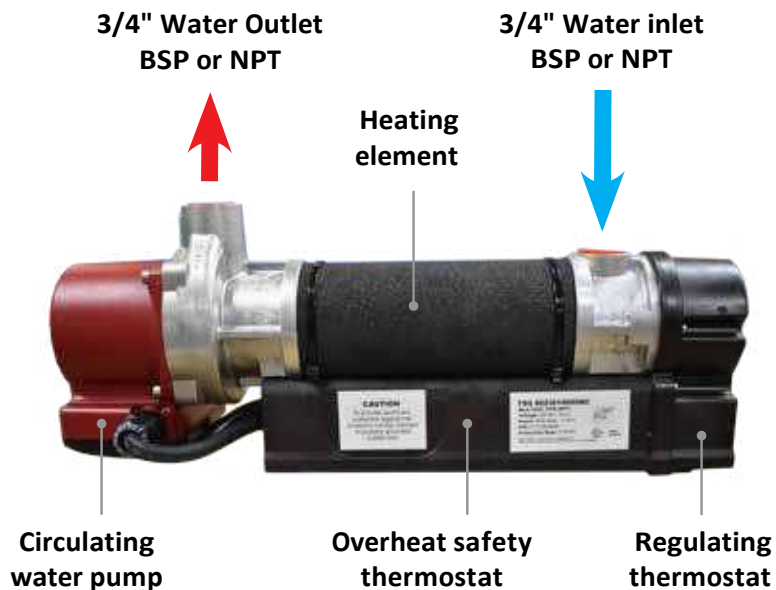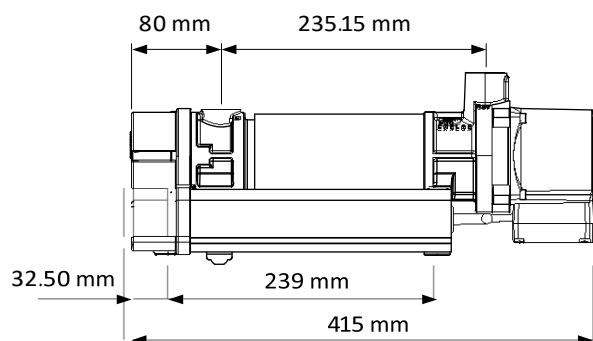

DELIVERED WITH CONNECTION KIT AND MOUNTING KIT

INSTALLATION DIAGRAM

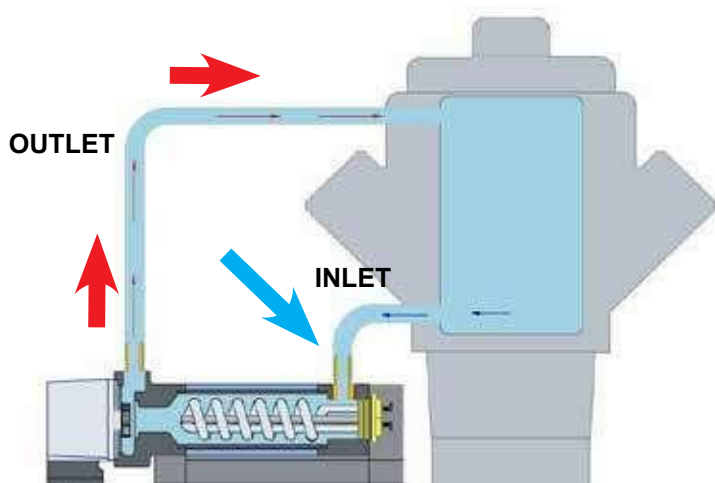

CONNECTION KIT



3/4" BSP or NPT

MOUNTING KIT

